

Choices

Premidoor

Lift and Slide Door - PVCU

A 'sliding' door of exceptional size for maximum viewing area and maximum performance in bad weather.


With sash sizes up to 3m wide and 2.5m high and smooth operation assured by lowering the rollers to lift the door off its seals, the main criteria is achieved.

Manufactured to a high standard in 168mm Kommerling profile with internal glazing. Available in standard White profile or enhanced by Mahogany, Golden Oak, Dark Green and a choice of four Greys.

1.3
Door
U Value

Standard Specification

- 168mm profile depth with internal beads
- 111mm meeting style
- Black gaskets
- Stainless steel rollers on stainless steel track
- Glazing - 28mm sealed units - 6mm toughened Planitherm Ultra N - Stainless steel spacer and Argon
- Above 5401mm width - 30mm units - 8mm toughened Planitherm Ultra N - Stainless steel spacer and Argon
- 1.1 Centre pane U Value
- 1.3 Door U Value

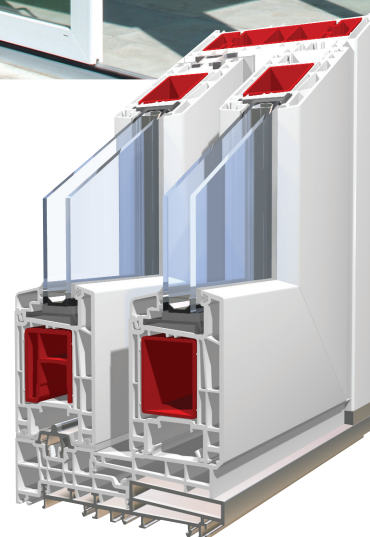


Performance result

Two pane 3500w x 2300h

Water resistance to 450Pa

Wind resistance to 2300Pa



Coloured foil options

Standard foils



Mahogany



Golden Oak

Special foils on white only



Dark Green



Silver Grey



Anthracite Grey



Anthracite Grey
Plain



Slate Grey Plain

